

KillTest

Higher Quality, Better Service!



Q&A

<http://www.killtest.com>


We offer free update service for one year.

Exam : D-PDC-DY-23

Title : Dell Technologies
PowerSwitch Data Center
Deploy 2023

Version : DEMO

1.Refer to the exhibit.

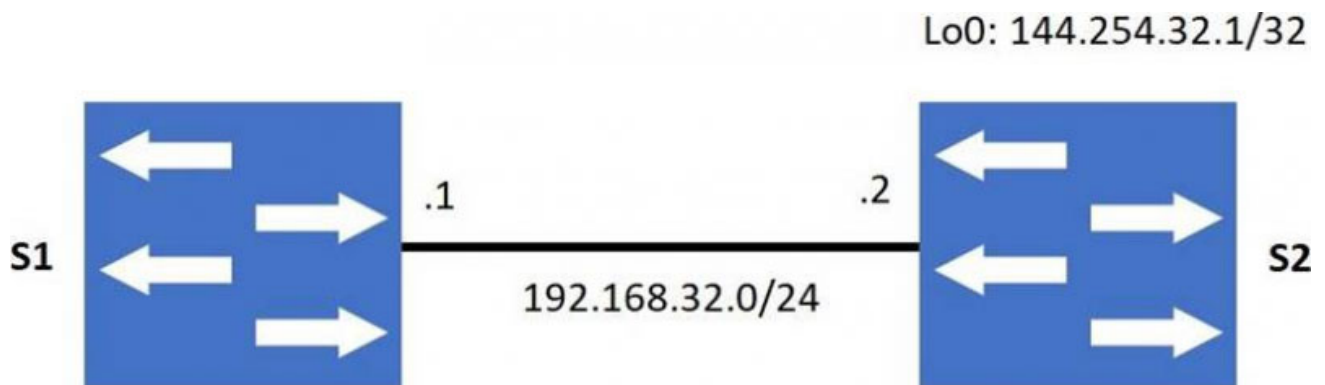

Which configuration will allow S1 to ping S2's Lo0 address?

- A. S1(config-router)# ip route 144.254.32.1 192.168.32.2/32
- B. S1(config-router)# ip route 192.168.32.2 144.254.32.1/32
- C. S1(config)# ip route 144.254.32.1/32 192.168.32.2
- D. S1(config)# ip route 192.168.32.2 144.254.32.1/32

Answer: C

2.When installing OS10 on a switch from a USB drive, what format is used for the file system?

- A. HFS+
- B. FAT32
- C. NTFS
- D. HFS

Answer: B

3.What do bridge protocol data units provide?

- A. Special data frames to exchange STP information
- B. Metadata transferred connecting two network bridges
- C. Configuration data exchanged during a VLTi setup
- D. Bridge information part of the LLDP protocol

Answer: A

4.A network administrator has to configure a virtual IP address using VRRP on interface VLAN 100 within OS10.

What are the correct steps to accomplish this?

- A. OS10(config)# interface vlan 100
OS10(conf-if-vl-100)# ip address 10.0.100.2/24
OS10(conf-if-vl-100)# vrrp-group 256
OS10(conf-vlan100-vrid-256)# virtual-address 10.0.100.1
- B. OS10(config)# interface vlan 100
OS10(conf-if-vl-100)# ip address 10.0.100.2/24
OS10(conf-if-vl-100)# standby-group 250
OS10(conf-vlan100-vrid-250)# virtual-address 10.0.100.1
- C. OS10(config)# interface vlan 100

```
OS10(conf-if-vl-100)# ip address 10.0.100.1/24
OS10(conf-if-vl-100)# vrrp-group 250
OS10(conf-vlan100-vrid-250)# virtual-address 10.0.100.2
D. OS10(config)# interface vlan 100
OS10(conf-if-vl-100)# ip address 10.0.100.1/24
OS10(conf-if-vl-100)# standby-group 256
OS10(conf-vlan100-vrid-256)# standby-address 10.0.100.2
```

Answer: C

5.What are mandatory LLDPDU TLV's?

- A. 0123
- B. 0124
- C. 0456
- D. 1234

Answer: A